


PA HIGH SPEED COMPACT HOLLOW ROTARY HYDRAULIC CYLINDERS

超薄型高速中空油壓迴轉缸



尺寸圖 » Dimensions

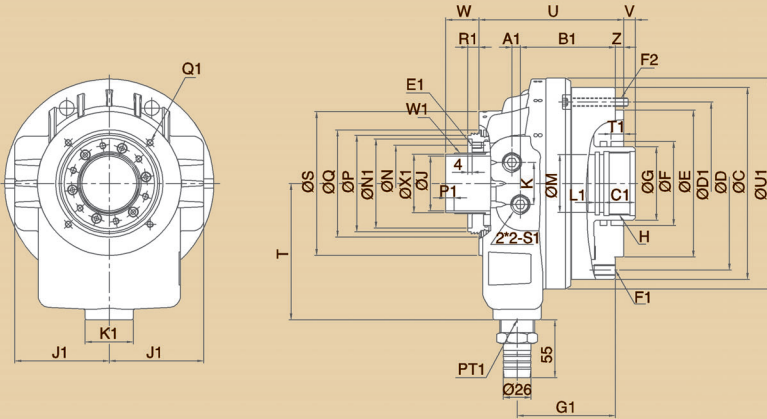

規格表 » Specifications

單位/UNIT:mm

型式/規格 MODEL /SPEC.	A1	B1	C	C1	D	D1	E (h7)	E1	F	F1	F2	G	G1	H	J	
PA1246	8	80.5	165	25	147	147	130	6-M6x1P	75	6-M10x1.5P	6-M8x1.25P	65	86	M55x2P	46	
PA1452	8	90	183	30	165	165	140	6-M6x1P	80	6-M10x1.5P	6-M8x1.25P	70	93.5	M60x2P	52	
PA1775	10.5	109.9	215	35	195	195	160	6-M6x1P	105	12-M10x1.5P	6-M10x1.5P	95	111	M85x2P	75	
型式/規格 MODEL /SPEC.	J1	K	K1	L1	M	N	N1	P	P1	Q	Q1	R1	S	S1	T	T1
PA1246	80	40	46	15	50	64	76	85	9	90	4-M5x0.8P(PCDø98)	10.5	121	PT 3/8	120	12
PA1452	90	40	46	15	55	73	85	96	8	102	4-M6x1P(PCDø110)	10.5	137	PT 3/8	130	12
PA1775	106	46	46	15	80	98	108	120	9	126	4-M6x1P(PCDø155)	10.5	165	PT 1/2	160	12
型式/規格 MODEL /SPEC.	U	U1	V max.	V min	W max.	W1	W min	X1	活塞行程 Piston Stroke (mm)	Z	最高迴轉速 Max.Speed r.p.m.(min ⁻¹)	活塞直徑 Piston Dia (mm)	慣性矩I Moment of Inertia (kg·m ²)			
PA1246	128	183	5	-11	45	M52x1.5P	29	49.8	16	8	8000	128	0.02			
PA1452	138	201	11	-11	53.5	M58x1.5P	31.5	55.8	22	8	6500	145	0.035			
PA1775	165	233	14	-11	57	M84x2P	32	80.8	25	8	5500	170	0.065			
型式/規格 MODEL /SPEC.	流量 Oil Leakage Rate (l/min)	最高使用壓力 Max. Pressure (MPa)	活塞面積 Piston Area (cm ²)	最大推(拉)力 Max. Operating Force	淨重 Weight (kg)											
			推力側 Push Side	拉力側 Pull Side												
PA1246	3.0	46 (4.5)	103.5	92	9.5											
PA1452	3.9	46 (4.5)	134	123	12.3											
PA1775	4.2	46 (4.5)	165	151	19.65											

★流量測試標準-壓力:30kgf/cm²(2.94MPa) 油溫:50°C ★Test standard of oil leakage: Pressure-30 kgf/cm²(2.94MPa), Oil temperature-50°C