


大孔徑三爪 高速中空油壓夾頭 高精度

新產品
NEW



尺寸圖 >> Dimensions

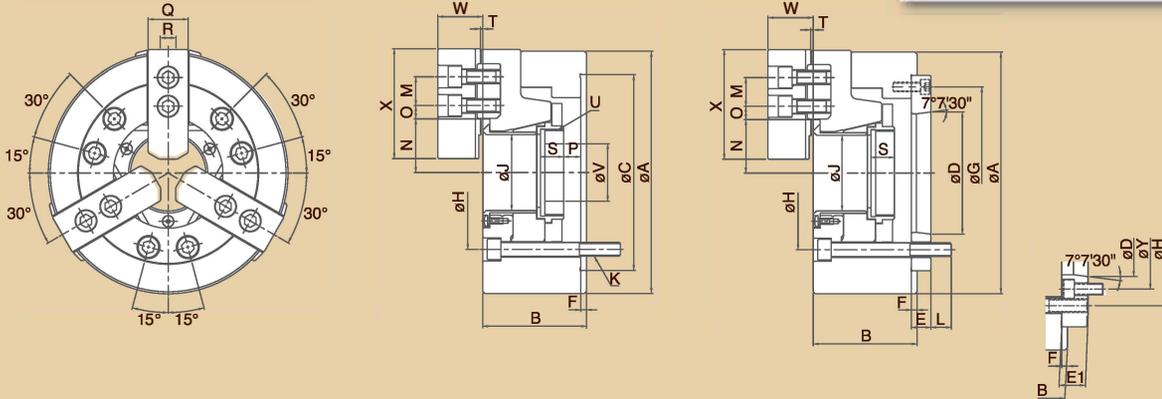

規格表 >> Specifications

單位/UNIT:mm

型式/規格 MODEL /SPEC.	主軸鼻端番號 Nose Of Spindle		A	B	C (h6)		D	E	E1	F	G	H	J
PB-206	A ₂ -5		170	81	140		82.563	15	--	5	116	104.8	52
PB-208	A ₂ -6(A ₂ -5)		210	91	170		106.375	17	23	5	150	133.4	66
PB-210	A ₂ -8(A ₂ -6)		254	100	220		139.719	18	28	5	190	171.4	81
型式/規格 MODEL /SPEC.	K	L	M	N max.		N min	O max.	O min	P max.	P min	Q	R	
PB-206	6-M10x1.5P	16	20	36.29		33.44	21.05	9.05	11	-1	31	12	
PB-208	6-M12x1.75P	18	25	46.55		42.75	23.55	11.55	14.5	-1.5	35	14	
PB-210	6-M16x2P	24	30	54.05		49.66	33.55	11.05	8.5	-10.5	40	16	
型式/規格 MODEL /SPEC.	S	T	U	V	W	X	Y	通孔直徑 Thru-Hole [Diameter] (mm)	柱塞行程 Plunger Stroke (mm)	爪行程〔直徑〕 Jaw Stroke [Diameter] (mm)			
PB-206	19	2.2	M60x2P	20	37.5	73	--	52	12	5.5			
PB-208	20.5	2.1	M75x2P	30	39.5	95	104.8	66	16	7.4			
PB-210	25	1.7	M90x2P	40	43	110	133.4	81	19	8.8			
型式/規格 MODEL /SPEC.	最高迴轉速 Max.Speed r.p.m.(min ⁻¹)	最大拉力 Max. Pull Force kgf (kN)		最大靜夾持力 Max. Gripping Force kgf (kN)		最大設定油壓壓力 Max. Hydr. Pressure kgf/cm ² (MPa)		搭配 油壓缸型號 Matching Cylinder		淨重 Weight (kg)			
PB-206	6000	2200 (21.5)		5900 (58)		21 (2.0)		P1452S		9.5			
PB-208	5000	3400 (33)		8800 (86)		26 (2.5)		P1666S		12.3			
PB-210	4200	4300 (42)		11100 (109)		29 (2.8)		P1881S		19.65			