


MP-M HOLLOW POWER CHUCK FIXTURES (FRONT-LOCK DESIGN)(4"~6")

內藏式中空油壓夾盤

新產品
NEW



尺寸圖 » Dimensions

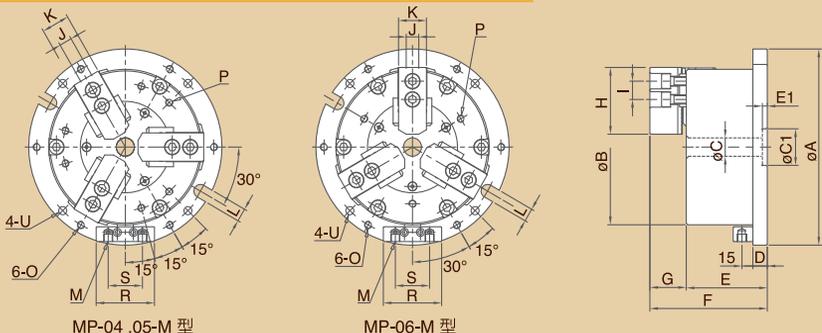

規格表 » Specifications

單位/UNIT:mm

| 型式/規格 MODEL /SPEC. | A | B | C | C1 | D | E | E1 | F | G | H | I | J | K | L | M | S | R | P | U |
|--------------------------|--------------------|-----|---|----|--|----|---|-------|--|------|--|----|------------------------------------|----|---------|----|----|----------------------|---------------|
| MP-04-M | 157 | 115 | -- | 40 | 13.5 | 78 | 4.5 | 104.5 | 26.5 | 49.5 | 14 | 10 | 23 | 13 | 2-PT1/8 | 47 | 64 | 6-M6×1P (PCD Ø90) | Ø9(PCD Ø135) |
| MP-05-M | 185 | 135 | -- | 40 | 15 | 85 | 5.5 | 118 | 33 | 62 | 14 | 10 | 25 | 13 | 2-PT1/4 | 47 | 80 | 6-M8×1.25P(PCD Ø110) | Ø9(PCD Ø165) |
| MP-06-M | 224 | 170 | 20 | 40 | 16 | 90 | 5.5 | 130.5 | 40.5 | 73 | 20 | 12 | 31 | 18 | 2-PT1/4 | 47 | 80 | 3-M8×1.25P(PCD Ø120) | Ø11(PCD Ø202) |
| 型式/規格 MODEL /SPEC. | O | | 活 塞 面 積 Piston Area (cm ²) | | 柱 塞 行 程 Plunger Stroke (mm) | | 爪 行 程 (直 徑) Jaw Stroke (Diameter)(mm) | | 最 大 靜 夾 持 力 Max.Gripping Force kgf (kN) | | 最 大 設 定 油 壓 最 大 設 定 油 壓 壓力 Max. Hydr. Pressure kgf/cm ² (MPa) | | 夾 持 範 圍 Gripping Range | | | | | | |
| MP-04-M | M8×1.25P(PCD Ø135) | | 57 | | 9.5 | | 4 | | 2400 (23.5) | | 15 (1.5) | | ø11~ø115 | | | | | | |
| MP-05-M | M8×1.25P(PCD Ø165) | | 71.5 | | 10 | | 5.3 | | 3200 (31.3) | | 20 (2.0) | | ø12~ø135 | | | | | | |
| MP-06-M | M10×1.5P(PCD Ø202) | | 105 | | 10 | | 5.3 | | 4700 (46) | | 20 (2.0) | | ø20~ø170 | | | | | | |