

MP

HOLLOW POWER CHUCK FIXTURES (FRONT-LOCK DESIGN)(4"~6")


內藏式中空油壓夾盤

前鎖型設計

新產品
NEW



尺寸圖 » Dimensions

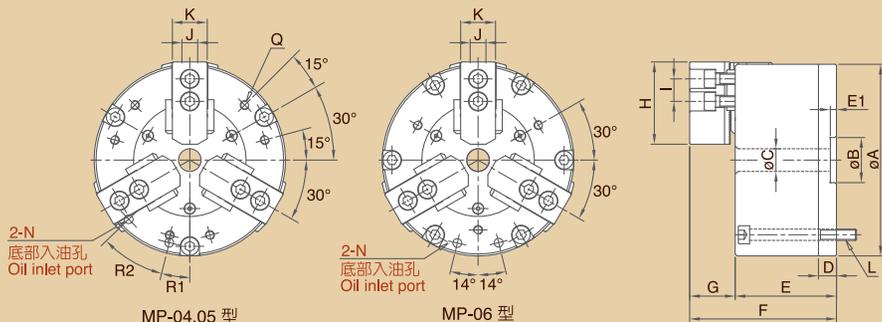

規格表 » Specifications

單位/UNIT:mm

型式/規格 MODEL /SPEC.	A	B	C	D	E	E1	F	G	H	I	J	K	L	N	R1	R2
MP-04	115	40	--	13.5	78	4.5	104.5	26.5	49.5	14	10	23	3-M8x1.25P(PCD ϕ 102)	2-P4(PCD ϕ 99)	14°	32°
MP-05	135	40	--	15	85	5.5	118	33	62	14	10	25	3-M8x1.25P(PCD ϕ 120)	2-P8(PCD ϕ 116)	13°	34°
MP-06	170	40	20	16	90	5.5	130.5	40.5	73	20	12	31	6-M10x1.5P(PCD ϕ 153)	2-P8(PCD ϕ 151)	--	--
型式/規格 MODEL /SPEC.	Q				活塞面積 Piston Area (cm ²)	柱塞行程 Plunger Stroke (mm)	爪行程(直徑) Jaw Stroke (Diameter)(mm)	最大靜夾持力 Max.Gripping Force kgf (kN)	最大設定油壓壓力 Max. Hydr. Pressure kgf/cm ² (MPa)	夾持範圍 Gripping Range						
MP-04	6-M6x1P(PCD ϕ 90)				57	9.5	4	2400 (23.5)	15 (1.5)	ϕ 11~ ϕ 115						
MP-05	6-M6x1P(PCD ϕ 110)				71.5	10	5.3	3200 (31.3)	20 (2.0)	ϕ 12~ ϕ 135						
MP-06	3-M8x1.25P(PCD ϕ 120)				105	10	5.3	4700 (46)	20 (2.0)	ϕ 20~ ϕ 170						